



200 series 24" under-counter wine storage unit

**RW 404** 

#### RW 404 761

Under-counter wine storage unit with stainless steel-framed glass door. Width 23%'' (60 cm). ADA compliant.

### Optional accessories

#### RA 050 220

Replacement activated charcoal air filter for upper and lower temperature zone.

## RA 097 600

Accessory for side-by-side installation of two under-counter wine climate cabinets.

# Highlights

- Two individual temperature zones, both continuously variable.
- Consistent temperatures with exact control from 41 °F to 64 °F.
- Extendable bottle trays in beech and aluminum.
- LED lighting.
- Cushioned door closing system allowing a soft and controlled door closure.
- Door lock.
- Number of standard wine bottles: 34.
- Side-by-side installation possible with special accessory.

#### Operation

Electronic temperature control with digital display.

## Touch keys.

Dimmable presentation light option in each climate zone.

Interior lighting with automatic dimming with opening and closing of door.

### **Technical Features**

Dynamic cool air distribution. Humidity control.

Cushioned door closing system integrated in door hinge.

Automatic defrosting with defrost water evaporation.

One activated charcoal air filter. UV-protection.

Open-door and malfunction warning system.

Energy-saving vacation mode.

#### Features

Net volume of 3.3 cu.ft. 34-bottle capacity. Five bottle trays, three of which are extendable. Storage of magnum bottles possible. LED lighting.

## Planning notes

Toe kick not included. Custom toe kick with ventilation louvers required. Flat hinge.

Door hinge right, reversible. Height-adjustable feet. Door opens to 95° and can be fixed. For integration next to a side wall, a clearance of 57/e" hinge side is required.

Plan a power outlet outside of the cut-out.


No transport/operation above 4,920 ft (1,500 m) sea level.

### Consumption data

Energy consumption 144 kWh/year. Noise level 3835 dB(A) re 1 pW.

# Rating

Total rating: 200 W/24h.
Total amps: 10 A.
120 V / 60 Hz.
Connecting cable 71" with plug.

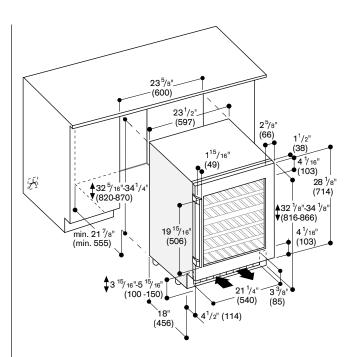

### Bottle storage

