



## Vario 400 series refrigeration column RC 472

### RC 472 705

Fully integrated.  
Width 30" (76.2 cm).

### Included accessories

1 egg holder with lid.

### Installation accessories

#### RA 421 713

Stainless steel door panel with handle.  
For 30" (76.2 cm) wide appliances,  
panel thickness 3/4".

#### RA 423 140

Side trims used to conceal the gap  
between the appliance and adjacent  
cabinet. White powder coated metal.

#### RA 425 110

Stainless steel handle for  
refrigerator door.  
With 3 mounts, length 4 1/2" (1,131 mm).

#### RA 428 713

Stainless steel door panel, **handleless**.  
For 30" (76.2 cm) wide appliances,  
panel thickness 3/4".

#### RA 460 000

Installation kit for side-by-side  
installation for connecting any two  
columns. Included in delivery for RF  
and RW.

#### RA 460 012

Additional side heating element 110 V.  
Required if appliances are installed  
with a distance greater than 5/8" and  
less than 6 5/16" next to each other and  
for all built-in situations in a very  
humid environment. Not required if  
appliances are installed more than  
6 5/16" apart from each other.

#### RA 460 020

Connecting element for custom  
cabinet fronts when panels are split  
vertically to create one door front.

#### RA 464 711

Ventilation grill stainless steel  
For RC 472 30" (76.2 cm) wide  
appliances.

### Optional accessories

#### RA 430 100

Storage container with transparent lid,  
anthracite.

#### Part #11031964

Egg holder insert (for use with  
RA 430 100).

### Highlights

- Stainless steel interior with solid anthracite aluminum elements.
- Warm white and glare-free LED light spots.
- Opening assist for door with two options:
  1. Push-to-open function for integration into handleless cabinet front.
  2. Pull-to-open function to facilitate opening the door using a handle.
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door bins can be aligned on the same level.
- Flat stainless steel inner door, full-length.
- Almost invisible rail system for shelves and door bins for flexible positioning.
- Solid anthracite aluminum door bins.
- One fresh cooling drawer 32 °F (0 °C) with manually adjustable temperature and one fresh cooling drawer with manually adjustable humidity.
- TFT touch display.
- ENERGY STAR® certified.
- Sabbath mode certified by Star-K.
- Net volume 16.8 cu.ft.

### Operation

TFT touch display operation.  
Clear text display in 52 languages.

### Features

Dynamic cold air distribution with Multi-Flow Air System.  
Automatic defrosting with defrost water evaporation.  
Cushioned door closing system.  
Activated charcoal air filter.  
When rest mode (Sabbath mode) is active, the appliance can only be opened using a handle.  
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi. The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.  
For further information please check: [home-connect.com](http://home-connect.com).

### Cooling

No-Frost technology with fast cooling.  
Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C).  
3 safety glass shelves, white glass, individually adjustable in height.  
1 shallow, fully extendable drawer with transparent front.  
1 integrated shelf with satin-finished glass.  
Cushioned closing system.  
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.  
Flat door rail system with fully flexible positioning of door bins.  
4 height-adjustable door bins, one of which is a large gallon door bin.  
Net volume 16.8 cu.ft.

### Fresh cooling close to 32 °F (0 °C)

1 large, fully extendable fresh cooling 32 °F (0 °C) drawer with transparent front, illuminated.  
Cushioned closing system.  
Temperature control via central TFT display, temperature can be adjusted from 30 °F to 38 °F (-1 °C to +3 °C).  
Ideal for meat, fish and poultry.

### Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.  
Cushioned closing system.  
Humidity can be adjusted manually.  
Ideal for fruit and vegetables.

### Consumption data

Energy consumption 279 kWh/year.  
Noise level 40 dB(A) re 1 pW.

### Planning notes


Flat hinge.  
Door hinge right, reversible.  
Door opening angle of 115°, fixable at 90°.  
Ships with white ventilation grill.  
Stainless steel grill is an optional accessory. No toe kick provided.  
Max. door panel weight: 53 lbs. (24 kg).

**Please read additional planning notes on page 248-257.**

### Rating

Total rating: 760 W/24h.  
Total Amps: 10 A.  
120 V / 60 Hz  
Connecting cable 118" (3.0 m), detachable.  
Electrical location 6" above ground in lower left corner of unit.



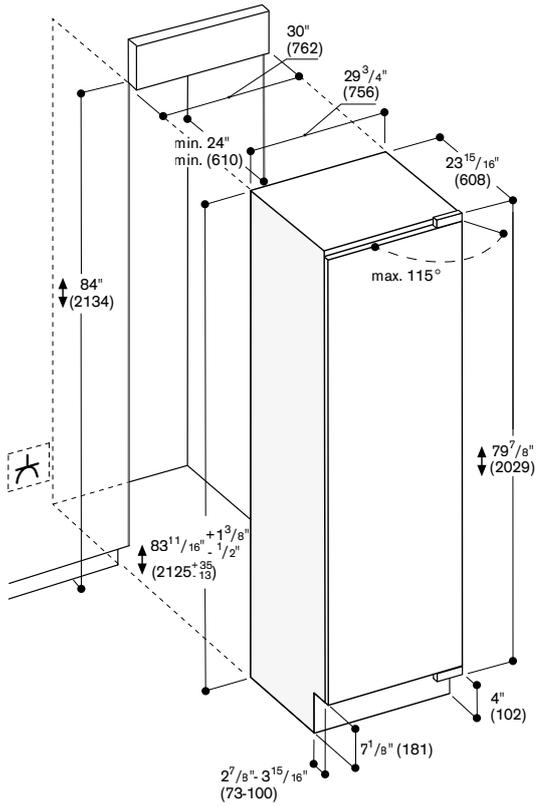

The door face dimensions are designed for a maximum gap of 1/8" (3 mm).  
See more details on page 252.