



400 series warming drawer WS 461

WS 461 710

Stainless steel-backed glass front.
Width 24" (60 cm), Height 5 3/8" (14 cm)

Highlights

- Handleless warming drawer.
- Bright interior light.
- Cushioned closing system.
- Hygienic stainless steel interior with glass bottom.
- 4 temperature levels ranging from 100 °F - 175 °F.
- Also for preparing and cooking meals.
- Net volume 0.75 cu.ft.

Cooking modes

Defrosting of meals/proofing of yeast dough.
Preheating of small beverages.
Keeping meals warm/slow cooking.
Warming of ovenware.

Operation

Rotary knob operation.
Recessed grip at the front bottom of drawer.

Features

Volume capacity: coffee set for 10 including espresso cups, cappuccino cups and plates or place settings for six including ø 11" plates and bowls.
Max. load 55 lbs.
Usable interior dimensions:
H 3 3/4" x W 18 11/16" x D 18 3/16"
Integrated heating under glass for easy cleaning.
Convection fan for even heat distribution.
Status display, visible in the glass front.
Glass bottom made of safety glass.


Planning notes

The front of the appliance extends 1 7/8" from the cabinet carcass.
Installation of BS Combi-steam oven/ BM Combi-microwave oven/ CM espresso machine directly above drawer in 24" cutout without a partition shelf in between.
Built-in under countertop or in single cut-out.
When mounting the drawer below the 400 series Combi-steam oven, plan a recess of at least 1 3/8" between the back wall and the drawer to allow for the inlet and outlet hose to be installed appropriately.
The electrical outlet can be planned behind the appliance.

Please read the installation details regarding oven combination on page 12-13.

Rating

Total rating: 810 W.
Total Amps: 10 A.
120 V / 60 Hz
Connecting cable 59" with plug.

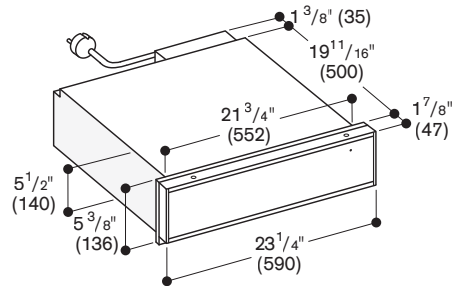

Side view of WS 461 below BS Combi-steam oven, BM Combi-microwave oven or CM espresso machine

